


# SUNNY BOY 3.0-US / 3.8-US / 5.0-US / 6.0-US / 7.0-US / 7.7-US



SB3.0-1SP-US-41 / SB3.8-1SP-US-41 / SB5.0-1SP-US-41 / SB6.0-1SP-US-41 / SB7.0-1SP-US-41 / SB7.7-1SP-US-41 / SB3.0-1TP-US-41 / SB3.8-1TP-US-41 / SB5.0-1TP-US-41 / SB6.0-1TP-US-41 / SB7.0-1TP-US-41 / SB7.7-1TP-US-41



**INTEGRATED SUNSPEC  
RAPID SHUTDOWN**

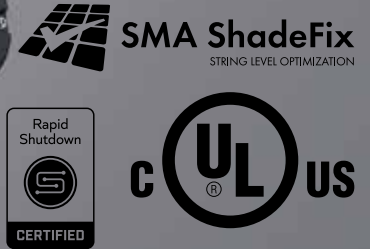

Value-Added Improvements	Reduced Labor	Unmatched Flexibility	Trouble-Free Logistics
<ul style="list-style-type: none"> <li>SunSpec certified technology for cost-effective module-level shutdown</li> <li>Advanced AFCI compliant to UL 1699B for arc fault protection</li> </ul>	<ul style="list-style-type: none"> <li>New Installation Assistant with direct access via smartphone minimizes time in the field</li> <li>Advanced communication interface with fewer components creates 50% faster setup and commissioning</li> </ul>	<ul style="list-style-type: none"> <li>Shade Fix, SMA's proprietary shade management solution, optimizes at the string level</li> <li>Multiple independent MPPTs accommodate hundreds of stringing possibilities</li> </ul>	<ul style="list-style-type: none"> <li>Integrated wall mount bracket speeds installation and simplifies logistics</li> <li>Equipped with SMA Smart Connected, a proactive service solution that is integrated into Sunny Portal</li> </ul>

## SUNNY BOY 3.0-US / 3.8-US / 5.0-US / 6.0-US / 7.0-US / 7.7-US

Power with a purpose

The residential PV market is changing rapidly. Your bottom line matters more than ever—so we've designed a superior residential solution to help you decrease costs at every stage of your business operations. The Sunny Boy 3.0-US/3.8-US/5.0-US/6.0-US/7.0-US/7.7-US join the SMA lineup of field-proven solar technology backed by the world's #1 service team, along with a wealth of improvements. Simple design, improved stocking and ordering, value-driven sales support and streamlined installation are just some of the ways that SMA helps your business operate more efficiently. And, Sunny Boy's superior integration with the innovative Power+ Solution means installers have even more flexibility in addressing their toughest challenges. Finally, SMA Smart Connected will automatically detect errors and initiate the repair and replacement process so that installers can reduce service calls and save time and money.

Technical data	Sunny Boy 3.0-US		Sunny Boy 3.8-US		Sunny Boy 5.0-US	
	208 V	240 V	208 V	240 V	208 V	240 V
<b>Input (DC)</b>						
Max. PV power	4800 Wp		6144 Wp		8000 Wp	
Max. DC voltage			600 V			
Rated MPP voltage range	155 - 480 V		195 - 480 V		220 - 480 V	
MPPT operating voltage range			100 - 550 V			
Min. DC voltage / start voltage			100 V / 125 V			
Max. operating input current per MPPT			10 A			
Max. short circuit current per MPPT			18 A			
Number of MPPT tracker / string per MPPT tracker			2/1		3 / 1	
<b>Output (AC)</b>						
AC nominal power	3000 W	3000 W	3330 W	3840 W	5000 W	5000 W
Max. AC apparent power	3000 VA	3000 VA	3330 VA	3840 VA	5000 VA	5000 VA
Nominal voltage / adjustable	208 V / ●	240 V / ●	208 V / ●	240 V / ●	208 V / ●	240 V / ●
AC voltage range	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V
AC grid frequency	60 Hz / 50 Hz					
Max. output current	14.5 A	12.5 A	16.0 A	16.0 A	24.0 A	21.0 A
Power factor (cos $\phi$ ) / harmonics	1 / < 4 %					
Output phases / line connections	1 / 2					
<b>Efficiency</b>						
Max. efficiency	97.2 %	97.6 %	97.3 %	97.6 %	97.3 %	97.6 %
CEC efficiency	96.2 %	96.3 %	96.4 %	96.7 %	96.7 %	96.9 %
<b>Protection devices</b>						
DC disconnect device / DC reverse polarity protection			● / ●			
Ground fault monitoring / Grid monitoring			●			
AC short circuit protection			●			
All-pole sensitive residual current monitoring unit (RCMU)			●			
Arc fault circuit interrupter (AFCI)			●			
Protection class / overvoltage category			I / IV			
<b>General data</b>						
Dimensions (W / H / D) in mm (in)	535 x 730 x 198 (21.1 x 28.5 x 7.8)					
Packaging dimensions (W / H / D) in mm (in)	600 x 800 x 300 (23.6 x 31.5 x 11.8)					
Weight / packaging weight	26 kg (57 lb) / 30 kg (66 lb)					
Temperature range: operating / non-operating	-25 °C ...+60 °C / -40 °C ...+60 °C					
Environmental protection rating	NEMA 3R					
Noise emission (typical)	39 dB(A)					
Internal power consumption at night	< 5 W					
Topology / cooling concept	transformerless / convection					
<b>Features</b>						
Ethernet ports			2			
Secure Power Supply			●*			
Display (2 x 16 characters)			●			
2.4 GHz WLAN / External WLAN antenna			●/○			
ShadeFix technology for string level optimization			●			
Cellular (4G / 3G) / Revenue Grade Meter			○/○**			
Warranty: 10 / 15 / 20 years ***			●/○/○			
Certificates and approvals	UL 1741, UL 1741 SA incl. CA Rule 21 RSD, UL 1998, UL 1699B Ed. 1, IEEE1547, FCC Part 15 (Class A & B), CAN/CSA V22.2 107.1-1, HECO Rule 14H, PV Rapid Shutdown System Equipment					
● Standard features ○ Optional features – Not available						
NOTE: US inverters ship with gray lids. Data at nominal conditions * Not compatible with TS4 devices **Standard in SBX.X-1TP-US-41						
Type designation	SB3.0-1SP-US-41 / SB3.0-1TP-US-41		SB3.8-1SP-US-41 / SB3.8-1TP-US-41		SB5.0-1SP-US-41 / SB5.0-1TP-US-41	



External WLAN antenna  
EXTANT-US-40



SMA Rooftop  
Communication Kit  
ROOFCOMMKIT-P2-US




Revenue Grade  
Meter Kit  
RGM05KIT-US-10



Cellular Modem Kit  
CELLMODKIT-US-10

\*\*\* Listed warranty terms are applicable in SMA-designated primary support countries, including the U.S., Canada, and Mexico. Reduced terms or restrictions may apply in other Americas regions and territories including the Pacific and Caribbean.

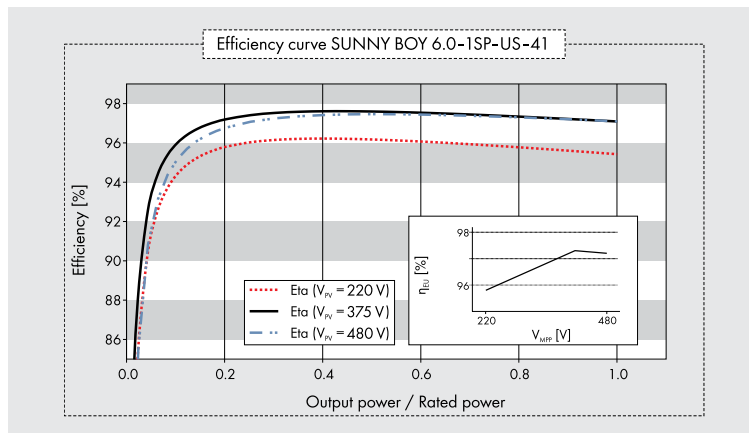

Technical data	Sunny Boy 6.0-US		Sunny Boy 7.0-US		Sunny Boy 7.7-US	
	208 V	240 V	208 V	240 V	208 V	240 V
<b>Input (DC)</b>						
Max. PV power	9600 W <sub>p</sub>		11200 W <sub>p</sub>		12320 W <sub>p</sub>	
Max. DC Voltage			600 V			
Rated MPP Voltage range	220 - 480 V		245 - 480 V		270 - 480 V	
MPPT operating voltage range			100 - 550 V			
Min. DC voltage / start voltage			100 V / 125 V			
Max. operating input current per MPPT			10 A			
Max. short circuit current per MPPT			18 A			
Number of MPPT tracker / string per MPPT tracker			3 / 1			
<b>Output (AC)</b>						
AC nominal power	5200 W	6000 W	6660 W	7000 W	6660 W	7680 W
Max. AC apparent power	5200 VA	6000 VA	6660 VA	7000 VA	6660 VA	7680 VA
Nominal voltage / adjustable	208 V / ●	240 V / ●	208 V / ●	240 V / ●	208 V / ●	240 V / ●
AC voltage range	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V	183 - 229 V	211 - 264 V
AC grid frequency	60 Hz / 50 Hz					
Max. output current	25.0 A	25.0 A	32.0 A	29.2 A	32.0 A	32.0 A
Power factor (cos φ) / harmonics	1 / < 4 %					
Output phases / line connections	1 / 2					
<b>Efficiency</b>						
Max. efficiency	97.3 %	97.7 %	97.3 %	97.9 %	97.3 %	97.5 %
CEC efficiency	96.7 %	96.9 %	96.4 %	96.8 %	96.4 %	96.8 %
<b>Protection devices</b>						
DC disconnect device / DC reverse polarity protection	● / ●					
Ground fault monitoring / Grid monitoring	●					
AC short circuit protection	●					
All-pole sensitive residual current monitoring unit (RCMU)	●					
Arc fault circuit interrupter (AFCI)	●					
Protection class / overvoltage category	I / IV					
<b>General data</b>						
Dimensions (W / H / D) in mm (in)	535 x 730 x 198 (21.1 x 28.5 x 7.8)					
Packaging Dimensions (W / H / D) in mm (in)	600 x 800 x 300 (23.6 x 31.5 x 11.8)					
Weight / packaging weight	26 kg (57 lb) / 30 kg (66 lb)					
Temperature range: operating / non-operating	-25 °C ...+60 °C / -40 °C ...+60 °C					
Environmental protection rating	NEMA 3R					
Noise emission (typical)	39 dB(A)				45 dB(A)	
Internal power consumption at night	< 5 W					
Topology / cooling concept	transformerless / convection			transformerless / fan		
<b>Features</b>						
Ethernet ports	2					
Secure Power Supply	●*					
Display (2 x 16 characters)	●					
2.4 GHz WLAN / External WLAN antenna	●/○					
ShadeFix technology for string level optimization	●					
Cellular (4G / 3G) / Revenue Grade Meter	○/○**					
Warranty: 10 / 15 / 20 years ***	●/○/○					
Certificates and approvals	UL 1741, UL 1741 SA incl. CA Rule 21 RSD, UL 1998, UL 1699B Ed. 1, IEEE1547, FCC Part 15 (Class A & B), CAN/CSA V22.2 107.1-1, HECO Rule 14H, PV Rapid Shutdown System Equipment					
● Standard features ○ Optional features – Not available						
NOTE: US inverters ship with gray lids. Data at nominal conditions * Not compatible with TS4 devices **Standard in SBX.X-1TP-US-41						
Type designation	SB6.0-1SP-US-41 / SB6.0-1TP-US-41		SB7.0-1SP-US-41 / SB7.0-1TP-US-41		SB7.7-1SP-US-41 / SB7.7-1TP-US-41	

## POWER+ SOLUTION

The SMA Power+ Solution combines legendary SMA inverter performance and intelligent DC module-level electronics in one cost-effective, comprehensive package. This means that you can achieve maximum solar power production for your customers while also realizing significant installation savings.

**NEW!** This rapid shutdown solution fulfills UL 1741, NEC 2014, and NEC 2017 requirements and is certified to the power line-based SunSpec Rapid Shutdown communication signal over DC wires, making it the most simple and cost-effective rapid shutdown solution on the market.

Visit [www.SMA-America.com](http://www.SMA-America.com) for more information.





### SIMPLE, FLEXIBLE DESIGN

Speed the completion of customer proposals and maximize the efficiency of your design team with the Sunny Boy-US series, which provides a new level of flexibility in system design by offering:

- » Hundreds of stringing configurations and multiple independent MPPTs
- » SMA's proprietary ShadeFix technology optimizes at the string level
- » Diverse application options including on- and off-grid compatibility



### VALUE-DRIVEN SALES ENABLEMENT

SMA wants to enable your sales team by arming them with an abundance of feature/benefit support. Show your customers the value of the Sunny Boy-US series by utilizing:

- » Secure Power Supply, now with 2,000 W of opportunity power in the event of a grid outage, as an increased value-add or upsell opportunity
- » SMA's 35 year history and status as the #1 global inverter manufacturer instills homeowners with peace of mind and the long-term security they demand from a PV investment
- » An economical solution for shade mitigation and the challenges of complex roofs



### IMPROVED STOCKING AND ORDERING

Ensure that your back office business operations run smoothly and succinctly while mitigating potential errors. The Sunny Boy-US series can help achieve cost savings in these areas by providing:

- » An integrated DC disconnect that simplifies equipment stocking and allows for a single inverter part number
- » All communications integrated into the inverter, eliminating the need to order additional equipment



### STREAMLINED INSTALLATION AND COMMISSIONING

Expedite your operations in the field by taking advantage of the new Sunny Boy's installer-friendly feature set including:

- » Direct access via smartphone and utilization of SMA's Installation Assistant, which minimizes time/labor spent in the field and speeds the path to commissioning
- » Simple commissioning and monitoring setup in a single online portal
- » New! Advanced communication interface with fewer components allows for 50% faster commissioning



### SUPERIOR SERVICE

SMA understands the factors that contribute to lifetime PV ownership cost, that's why the Sunny Boy-US series was designed for maximum reliability and backstopped by an unmatched service offering. Benefit from:

- » SMA Smart Connected, a proactive service solution integrated into Sunny Portal that automatically detects errors and initiates the repair and replacement process
- » The #1 service team in the PV industry, as recognized by IMS research, with experience servicing an installed base of more than 75 GW